

Model CI 89 Y  
Automatic strapping



The CI 89 Y is a reliable automatic strapping machine, with a site seal. Because of the easy variety in strap tension (up to 800 N), the CI 89 Y is suitable for many different products. The automatic strapping machine CI 89 Y is available for many branches. This machine is perfectly suitable to build in automatic processing lines.

#### Features:

##### Automatic refeed

Automatic strap feed the strap from the coil dispenser is placed between the guiding rolls. After activating the start button the strap is fed automatically. The strap reservoir is filled up and the machine is ready to start.

##### „Loop“ function

Loop function strap cycles having been initiated by error will not cause any problem. The strap is ejected and the next cycle can start again without any trouble.

##### Strap tension

Stepless adjustable.

#### Technical data:

Speed: up to 35 strap./min., depending on the strap tension and the size of the package

Arch size: width: 400 - 1600 mm  
height: 650 - 2250 mm

Min. package: 76 mm x 76 mm (WxH)

Strapping mat.: Polystrap 9, 12, 15,5 mm

Coil: inner core: 200 mm  
outer core: 490 mm  
width: 190 mm

Strap tension: 50 – 800 N

Noise: 78-85 dB(A)

Warming up: ca. 30 sec.

Voltage: 230 V, 50 Hz, 1 Ph., 0,65 kVa

Machine weight: approx. 160 kg

Colour: Ral 5003

##### Strap end sensor

Strap end sensor Coil end is detected by a sensor. Remaining strap within the machine will be automatically ejected and the machine is ready for coil change.

##### Operation

Operation strap cycle can be started either via push button, foot-pedal or separately by switch on table sensor. When a package/ bundle is placed into the machine area, the strap cycle starts automatically.

##### Variable seal time

Pop open of seals on critical products is now history. Selective timing for increased seal efficiency is possible via a switch.

##### Flexibal deployability


The CI 89 Y is almost everywhere deployable with the 4 wheels and 110 V power supply.

##### Fully automatic

The CI 89 Y is also available in a fully automatic version. This machine will be adapted to your demand, even with transport technology.

##### Arch size

The standard arch size is 600 x 850 mm. The arch can be enlarged, in frame measures of 200 mm, up to a maximum of 1.600 x 2.250 mm.

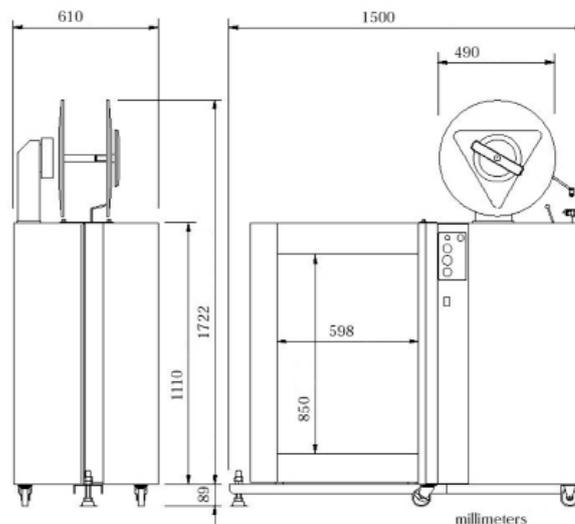

Subject to changes.

Cyklop UK Limited  
Unit 2, Generation Business Park  
Barford Road  
St. Neots, Cambridgeshire, PE19 6YQ

Phone: +44 (0)1480 216777  
Fax: +44 (0)1480 216779  
homepage: [www.cyklop.co.uk](http://www.cyklop.co.uk)  
e-mail: [info@cyklop.co.uk](mailto:info@cyklop.co.uk)

**CYKLOP**  
INTERNATIONAL

THE  
STRAPPING  
COMPANY

Update 09/2006